
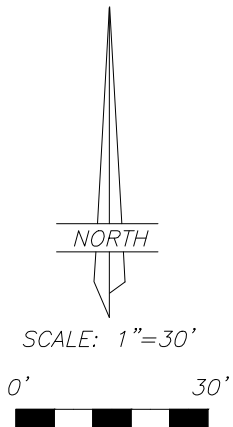



DUCHESNE COUNTY MONUMENT SURVEY RECORD

LINE	BEARING	DISTANCE	L6	N 18°07'40" W	75.87'
L1	N 56°16'56" W	57.88'	L7	S 42°56'09" W	45.68'
L2	N 44°30'46" W	43.47'	L8	S 51°04'28" W	44.18'
L3	N 42°28'52" E	41.59'	L9	N 74°29'09" E	81.55'
L4	N 45°54'29" E	36.86'			
L5	N 45°12'55" W	57.38'			

T1N R1W  
SEC 33 | SEC 34  
SEC 4  
T1S R1W  
U.S.B.&M.

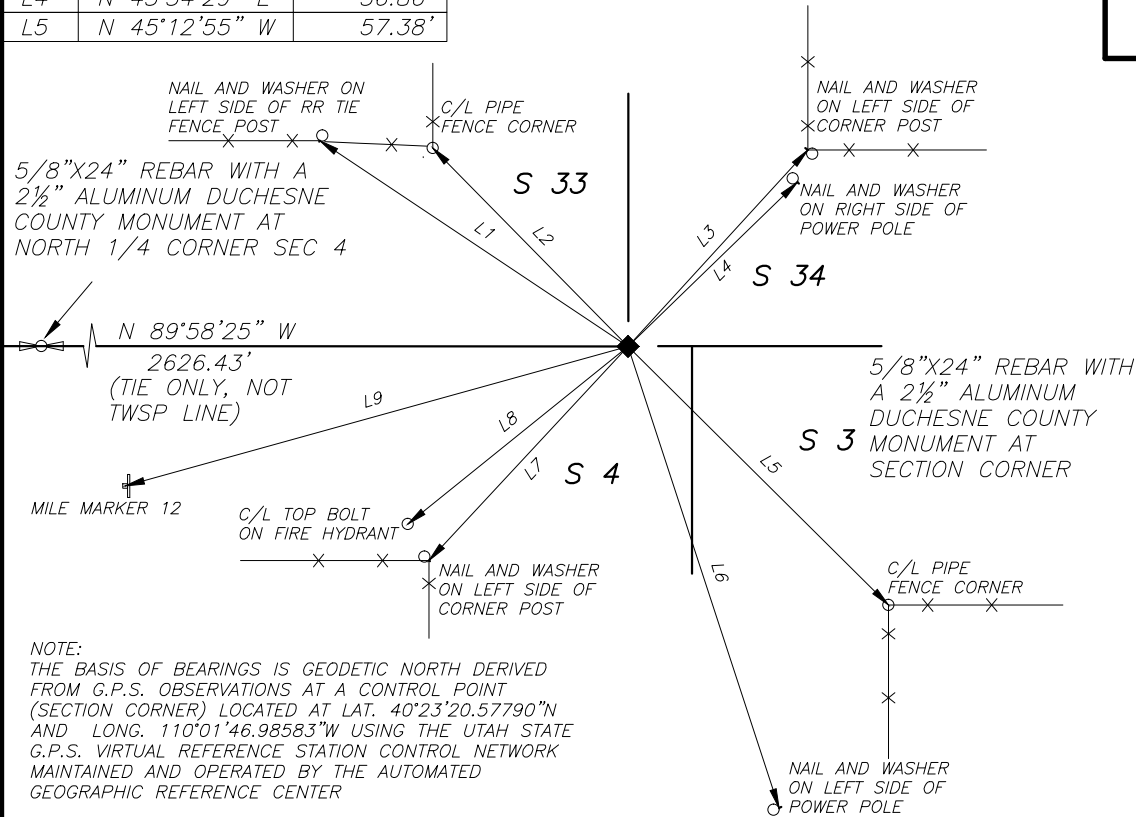

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND A 5/8" REBAR AT POSITION OF THE SECTION CORNER

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET A 5/8"x24" REBAR WITH A 2½" ALUMINUM DUCHESNE COUNTY MONUMENT IN THE COUNTY ROAD AT THE POSITION OF THE SECTION CORNER AFTER ROAD CONSTRUCTION



STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)  
NAD83 UTAH CENTRAL ZONE  
N:7329970.883  
E:2060136.446  
NAVD88 EL: 5945.35'

LATITUDE: 40°25'58.59868" N  
LONGITUDE: 109°59'31.79777" W  
ELLIPSOID HEIGHT: 5891.73'  
(GEOID 03 CONUS)  
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.  
UT300010N0010W0\_400100

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 28 FEB 2018

Jerry D. Allred, Professional Land Surveyor  
Certificate No. 148951  
Duchesne County Surveyor

